



ES280GF single door magnetic locks are compatible with access control, door phone, remote control system.

Door and lock status outputs included for remote monitoring and system application needs.

Most commonly used on standard size metal doors, wooden doors, fireproof doors, glass door.

Hanging installation / surface mounted.


**Features :**

- Dual voltage selectable (12VDC or 24VDC) ,
- Door status, lock status monitoring output,
- Low current consumption ,
- Reliable holding force,
- Voltage and current Spike protection PCB ,
- High strength material, anodized aluminum housing,
- Anti-residual magnetism kick-off button,
- Full range of optional brackets,
- Durable and silence operation.

**Specifications :**

Holding force :	280kg / 600lbs
Lock :	250 L x 27H x 48D mm
Armature :	180 L x 38 H x 11 D mm
Voltage input :	12VDC / 24VDC
Current Draw :	12V / 400mA ; 24V/250mA

**Installation :**

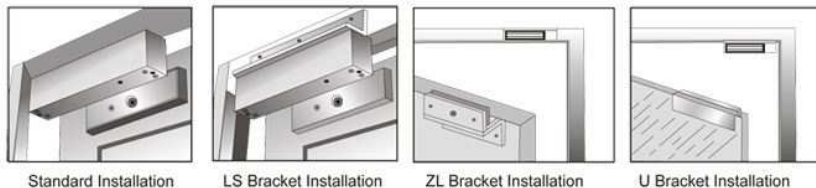

**Accessories :**

**U280 :**



**ZL280 :**

